


TEROS BOREHOLE INSTALLATION TOOL RENTAL RETURN INSTRUCTIONS



TEROS BIT RENTAL RETURN INSTRUCTIONS

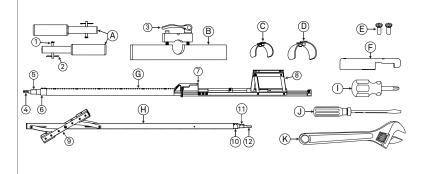

- A. Handles
- B. Base plate
 - . base plate
- C. Middle clip (1.0 in)
- D. Outer clip (1.25 in)
- E. Screws
- F. Jig

screwdriver

K. Crescent wrench

- G. Lower assembly
- H. Upper assembly
- Flat-head screwdriver
 Phillips[®]-head
- 10. Upper inner rod

1. Hair pin

3. Cam lever

7. Stop

9. Lever

4. Lower inner rod

2. Clevis pin (adjustable)

5. Lower middle sleeve

6. Lower middle collar

11. Upper middle collar

8. Sensor carriage

12. Upper outer sleeve

DISASSEMBLE TEROS BIT


Watch a video demonstration at How to Assemble the Borehole Installation Tool (metergroup.com/how-to-assemble-BIT) and follow the instructions in reverse to disassemble.

CLEAN AUGER AND TEROS BIT

- 1. Clean auger and TEROS BIT to remove any soil with water spray and dry.
- 2. If there is soil in the case, remove with a shop vacuum.


RETURN ALL PARTS TO CASE

- 1. Refer to the figure to return all parts to the correct location.
- 2. Close the case and make sure all latches are securely fastened.

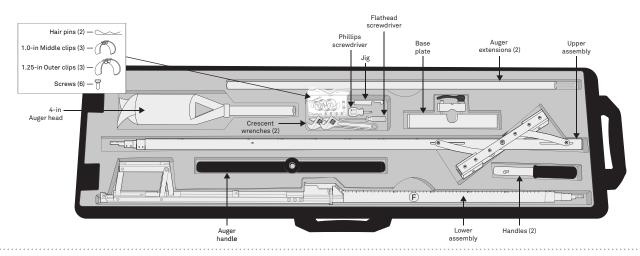

RETURN TEROS BIT TO METER GROUP

- 1. Place return shipping label (provided) directly over the original shipping label.
- 2. Take the case to a local FedEx[®] courier office or arrange a pickup.

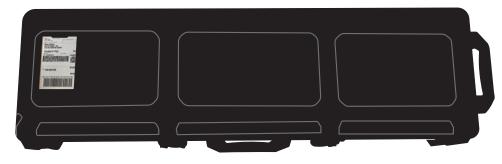

SUPPORT

Have a question or problem? Our support team can help.

We manufacture, test, calibrate, and repair every instrument in house. Our scientists and technicians use the instruments every day in our product testing lab. No matter what your question is, we have someone who can help you answer it.

NORTH AMERICA

EUROPE

Email: support.environment@metergroup.com Phone: +1.509.332.5600 Email: support.europe@metergroup.com Phone: +49 89 12 66 52 0